



PCT/GB 2003 / 0 0 3 9 2 0



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

REC'D	17 OCT 2003
WIPO	PCT

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that the attached copy of the request for grant of a Patent (Form 1/77) bears an amendment, effected by this office, following a request by the applicant and agreed to by the Comptroller-General.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed


*[Handwritten signature: J. Evans]*

Dated 1 October 2003

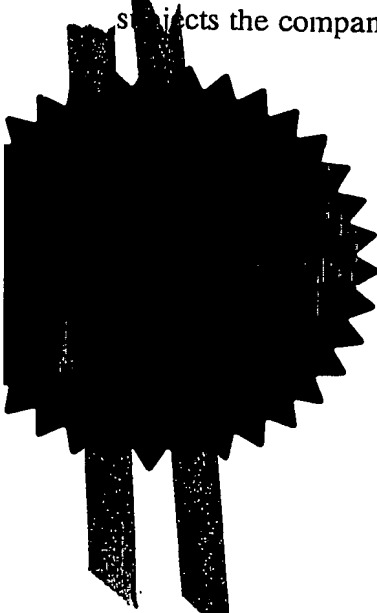

Patents Form 1/77

Patents Act 1977  
(Rule 16)

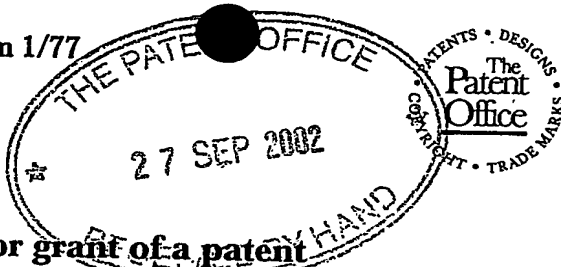

28SEP02 E751694-2 000571  
P01/7700 0.00-0222511.8

**Request for grant of a patent**

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference	WJN/P9115GB		
2. Patent application number (The Patent Office will fill in this part)	0222511.8		
3. Full name, address and postcode of the or of each applicant (underline all surnames)	Cambridge Correlators Limited, 10 Norwich Street, London. EC4A 1BD		
Patents ADP number (if you know it)	8472458001		
If the applicant is a corporate body, give the country/state of its incorporation	UK.		
4. Title of the invention	Optical Correlator		
5. Name of your agent (if you have one)	W. H. Beck, Greener & Co.		
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	W. H. Beck, Greener & Co. 7 Stone Buildings Lincoln's Inn London WC2A 3SZ		
Patents ADP number (if you know it)	323001		
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day / month / year)	
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))	Yes		

KILBURN & STRADE  
20 RED LION STREET  
LONDON  
WC1R 4RT

AB 14/3/03  
Form 51/77

# Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 24

Claim(s) 4

Abstract 0

Drawing(s) 7

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) One

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature *Buck Green*

Date 27/9/02

12. Name and daytime telephone number of person to contact in the United Kingdom Mr. William J. Neobard - (020) 7405 0921

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

OPTICAL CORRELATOR

The present invention relates to an optical correlator and to a method of correlating.

5

The correlation between two variables is a quantity indicating the closeness of the relationship between two functions. Where two functions can be precisely represented, the relation between them can be determined by  
10 an integral known as the correlation integral.

Thus, correlation may be performed computationally, for example in the field of digital signal processing.

15 In mathematical terms, for an arbitrary first function  $f(x)$  and an arbitrary second function  $g(x)$ , the correlation integral  $h(x)$  is set out in equation (1):

$$h(x) = \int_{-\infty}^{\infty} f(u) \times g(x+u) du \quad \text{----- (1)}$$

20 It is convenient, when providing a measure of the similarity between two images, not to form the correlation integral by computation but instead to use Fourier optics. The Fourier transform of the correlation integral is shown in equation (2):

25  $\mathcal{F}\{h(x)\} = F(s) \times G^*(s) \quad \text{----- (2)}$

where  $\mathcal{F}\{h(x)\}$  is the Fourier transform of  $\{h(x)\}$ ,  $F(s)$  and  $G(s)$  are the Fourier transforms of  $f(x)$  and  $g(x)$  respectively and  $*$  indicates the complex conjugate.

To explain the term "complex conjugate", a complex number expressed as  $x+jy$  ( $j$  is the square root of  $-1$ ), has a complex conjugate given by  $x-jy$ .

5        In the field of optics it is well known that a real (as opposed to virtual) image of the Fourier transform, of an input image is formed using a lens of positive optical power, (in other words a converging lens) at the back focal plane of the lens.

10

      It is therefore possible to apply two or more images, typically two images, such as a reference image and a scene image, side-by-side to a positive power lens and to form the Fourier transform of the two images at the back focal  
15 plane of the positive power lens.. The power of the joint transform of the two images is then sensed as the joint power spectrum. By analogy with the above discussion of correlation, if the Fourier transform of the reference and scene images is itself then Fourier transformed to provide  
20 a second Fourier transform, for example by application to a further positive power lens, then the second Fourier transform is indicative of the correlation between the two images. A device employing this technique is the subject of US Patent 5511019.

25

      Image display devices are usually pixellated. Thus the reference and scene images which are displayed on the image display devices are discontinuous. Now, the mathematical analysis of pixellated systems becomes  
30 complicated; however, the correlation results obtained using optical Fourier transforms of pixellated images are still valid.

A number of problems exist with optical correlators. One problem is that some types of image display device require an appreciable time to load an image. To mitigate  
5 this problem the state of the art currently favours the use of ferroelectric liquid crystal devices, which are relatively fast.

Other problems relate to the size of correlators in  
10 which two successive Fourier optical systems are required to provide two successive Fourier transforms.

The physical size has to some extent been addressed by earlier attempts to build correlators, such earlier  
15 attempts using the same Fourier optics for both transforming steps in a dual-pass system. For such devices the Fourier transform of the reference and scene images is obtained by applying information to produce those images on a display device such as an SLM (spatial light modulator)  
20 as initial input data. After application to Fourier optics, the intensity of the Fourier transform is sensed as first transform data. Then the initial input data is removed and the first transform data is substituted for the initial input data. The first transform data produces an  
25 image applied to the Fourier optics, to produce the second transform, and the intensity of the second transform is sensed to form the correlation data.

However, in spite of this double-use of the optics,  
30 the length of such a double-pass correlator is relatively large and there is an undesirable spatial separation between image display and image capture devices. The time to produce a valid correlation result includes the length

of time taken to write image data to the image production device, the length of time required for sensing the Fourier transform of the input image and the length of time for conveying that Fourier transform information back to the image production device, followed by the length of time again to write that information to the image production device, and the length of time for the image sensing device to sense the second Fourier transformed result. Thus, one of the consequences of the spatial separation between the input image and the Fourier-transformed resultant image is that the length of time taken to provide a correlation result is extended.

Ferroelectric liquid crystal devices are normally two-state devices, with both states, at least for phase devices normally being actively-driven states. Thus instead of providing a stimulus in one state, and none in the other (as is suggested by logic values "1" and "0"), mutually-opposite stimuli correspond to the two states, i.e. in reality "+1" and "-1". In any event, it is necessary to binarise the transform data before it can be applied to a two state SLM. This step can take an appreciable amount of time, and be a cause of slow correlation time.

According to a first aspect of the present invention there is provided an optical correlator having an image production device, an image capture device and an optical device constructed and arranged to provide a Fourier transform of image information from the image production device at the image capture device, wherein the image production device and image capture device are disposed in a common plane.

The common plane in some embodiments is the focal plane of a curved mirror. In other embodiments the common plane may be the focal plane of a planar mirror with a  
5 positive power lens.

By disposing the image production and capture devices locally to one another, the correlation speed of the correlator is increased by comparison with correlators in  
10 which the image production and capture devices are mutually remote. The physical size of a correlator having a folded architecture of this sort is less than the prior art correlators.

15 The image production device and the image capture device may be integrated on a common substrate.

By providing a common substrate, the operating conditions of the two devices can be made identical.  
20 Integration allows manufacturing costs to be minimised, and handling and alignment issues to be addressed.

In one family of embodiments, the image production device has plural image production elements, the image  
25 capture device has plural image capture elements and the image production elements and the image capture elements are within the image production elements.

By forming the elements interspersed or intercalated,  
30 the optical system does not provide a spatial offset of the image to be captured with respect to the image provided by the image production device. It should be borne in mind that illumination of the image production device is



substantially uniform and that where the image production and capture elements are interspersed, the information content of captured light is formed by subtracting the uniform amount from the total incident light.

5

In one of this family of embodiments, each image production element includes an image capture element.

10 The image capture elements may be relatively small by comparison to the image production elements so that a regular array of image production elements each contains an image capture element.

15 In another family of embodiments, the image production device and the image capture device are spatially separate.

20 In embodiments where the image production device and image capture device are spatially separate, special optical measures are taken to offset the resultant image from the optical system with respect to the image on the image production device.

25 The correlator may comprise at least one positive power optical device arranged to receive light from the image production device and to pass light back to the image capture device.

The positive power optical device may comprise a curved mirror.

30

Alternatively, the positive power optical device comprises a planar mirror and a positive power lens.

Instead of a mirror, a fibre array may be used to 'fold back' the light to the image capture device.

5       The image production device may comprise circuitry for applying reference image data to one part of the image production device, and circuitry for providing scene data to another distinct part of the image production device.

10       In one family of embodiments, the image production device provides phase modulation of light in response to displayed image data. In another family of embodiments the image production device provides amplitude modulation of light in response to displayed image data.

15       The image production device may have two output levels only.

20       The image production device may comprise a ferroelectric liquid crystal on silicon spatial light modulator (FLCOS SLM).

25       Alternatively, a nematic liquid crystal on silicon spatial light modulator may be used.

      In yet another family of embodiments, a microelectromechanical systems (MEMS) modulator is used.

30       According to a second aspect to the present invention there is provided a pixellated image capture device for a joint transform correlator, the image capture device being constructed and arranged to provide an electrical signal per pixel representative of the quantity of light received

at the pixel wherein the image capture device is integrated  
on a silicon substrate, and the integrated device further  
~~comprises processing circuitry constructed and arranged to~~  
compare the electrical signal of each pixel of the image  
5 capture device against a threshold, and to provide an  
output signal per pixel.

The threshold may be formed from the electrical  
signals of at least one pixel adjoining the said pixel.

10

The image capture device may further comprise a  
pixellated image production device, and the processing  
circuitry is constructed and arranged to provide each  
output signal per pixel to a respective pixel of the image  
15 production device.

The image capture device may further comprise output  
circuitry for reading out unprocessed information from each  
pixel.

20

According to a third aspect to the present invention  
there is provided a method of correlating at least one  
input image with at least one reference image, the method  
comprising illuminating a representation of the or each  
25 input image and the or each reference image with coherent  
light to provide a first light beam; passing the first  
light beam to an optical device disposed to provide a  
second image at a plane, the second image being a Fourier  
transform of the or each input image and reference images;  
30 wherein the second image is formed co-planar with the  
representation of the or each input image and reference  
image.

According to a fourth aspect of the present invention there is provided an integrated circuit comprising a liquid crystal on silicon spatial light modulator and an image  
5 capture device, the spatial light modulator having an array of light modulating elements and the image capture device having an array of light capture elements, wherein each light capture element is arranged to provide an output representative of the light picked up by the respective  
10 capture element, the integrated circuit further having processing circuitry for each capture element constructed and arranged to process the output of the said capture element together with the output of at least a respective one other capture element and to provide a first output  
15 from each capture element in response to such processing, the capture device further having output circuitry for outputting the unprocessed output of each capture element.

Two embodiments of the invention will now be described  
20 with reference to the accompanying drawings in which:-

Figure 1 shows a block schematic diagram of a first optical joint transform correlator embodying the present invention;

Figure 2 shows a block schematic diagram of a second  
25 optical joint transform correlator embodying the present invention;

Figure 3 shows a diagrammatic cross-sectional view through the image production and capture device of Figure 1;

30 Figure 4 shows cross-sections respectively through the circuitry level of the substrate, through the mirror and through the liquid crystal portions of the device of Figure 3;

Figure 5 shows a block schematic diagram of a part or an image production and capture device for use in the invention, incorporating processing and output circuitry.

Figure 6 shows a schematic diagram of processing circuitry of the device of Figure 3; and,

Figure 7 shows a block schematic diagram of a known optical joint transform correlator.

Referring first to Figure 7 a prior art dual-pass optical correlator 100 operates as a binary phase-only correlator. The correlator 100 has a first SLM 101 and a second SLM 102 arranged side-by-side in a common plane  $V1-V1'$ . The correlator 100 has a first input line 104, which is connected for applying a respective input signal to the first SLM 101. A second input line 103 is connected to apply an input signal to the second SLM 101. Reference image information is supplied over the first input 104 to the first SLM 101; scene image data is applied over the second input 103 to the second SLM 102.

20

The SLMs 101,102 are transparent and are illuminated from one side, as shown in the diagram the left-hand side, by collimated laser light 110. The light passes into the SLMs 101, 102 and emerges as light 110a, modified by the phase shifts imparted by the SLMs 101,102. The SLMs 101, 102 are pixellated and each pixel is binary; thus it is only able to provide a selected one of two possible phase shifts to light passing through that pixel. Hence the light 110a consists of spatially distinct beams of collimated light having a first or second phase shift with respect to the incident light 110. The beam 110a is incident on a Fourier converging lens 120, which has a screen 121 in its focal plane. The screen 121 displays the

joint Fourier transform of the reference and scene images. An image capture device 130 such as CCD camera 130 is disposed behind the screen 121 to capture the Fourier image data on the screen 121. The capture device 130 has an  
5 output 131 to a processing device 140. The processing device 140 has a first output 141, which forms a second input to the SLMs 101, 102. The processing device 140 also has a second output 142.

10       The joint Fourier transform data picked up by the capture device 130 is applied to the processor 140. The image on the screen 121 resulting from the application of the reference and scene images at the lens 120 is an analog interference pattern. Information derived from this  
15 pattern is to be applied to the binary SLMs 101, 102 for a second pass, and hence it is necessary to decide which of the binary levels is represented at each pixel of captured data. To do this, the processor 140 allots to each of the pixels a brightness value of 1 or 0 according to some pre-  
20 established criterion. The output 141 of the processor 140 conveys the binary information to the SLMs 101, 102. There the information is substituted for the reference and scene image information as new image data. Light 110 is then applied to the new image data displayed on the SLMs 101,  
25 102. Again the light is passed through the Fourier lens 120 to be incident on the screen 121. The capture device 130 picks up the image data which now represents the correlation between the two original input images, namely the reference and scene images originally applied to the  
30 SLMs 101, 102. The correlation data typically consists of two non-central bright spots 180 degrees symmetrical about the centre and a central bright spot. The central bright spot is the zero-order, i.e. undiffracted content, of the

joint power spectrum, shown as  $R^2$  and  $S^2$  in equation 3 below. For the purpose of determining the cross-correlation of the two original images, the zero-order may be regarded as unwanted. It may of course be useful in  
5 other respects.

The data picked up by the capture device 130 is applied again to the processor 140 which processes the image to extract information from the non-central peaks,  
10 outputting this information over the second output 142 as the desired correlation data.

Referring now to Figure 1, a joint transform correlator 1 receives laser light from an optical fibre 2  
15 launched into free-space so as to provide a divergent beam 3. The divergent beam 3 is incident upon a collimating lens 4 disposed so that its focal point is coincident with the end of the fibre 2. Other methods of launching coherent light may be substituted for the arrangement  
20 shown.

The collimating lens 4 provides a parallel beam 5 which is incident on a beamsplitter 6 here a polarising beamsplitter, although this is not essential. The  
25 polarising beamsplitter 6 is disposed to divert incident light via 90 degrees to provide an emergent beam of light 7 by reflection towards an image production and capture device 8 having an image production portion 8a and an image capture portion 8b arranged in a common plane. A second,  
30 beam 70 passes through the beamsplitter 6 and emerges in line with the fibre 2. The image production and capture device 8 in this embodiment is a combined ferroelectric liquid crystal spatial light modulator (FLCSLM) 8a and CMOS

smart pixel sensor array 8b, further described herein with respect to Figures 3,4 and 5. Between the polarising beamsplitter 6 and the device 8 there is a half-wave plate 9 which changes the direction of polarisation of light 7 to  
5 output light 7a which is incident on the image production and capture device 8 for alignment with the liquid crystal to bisect the liquid crystal axis for binary phase.

The image production portion 8a is pixellated, and as  
10 will be later described with respect to Figure 2, has an optically transparent front electrode 204. In this embodiment, the front electrode 204 is substantially continuous across the whole of the image production and capture device 8. The front electrode 204 is disposed over  
15 a ferroelectric liquid crystal layer 203, which is in turn disposed over a reflective aluminium layer 202. Data are provided to drive electrodes of the image production portion 8a, so as to cause the pixels of the image production portion to display a reference image r and a  
20 scene image s, the two images being side-by-side and provided in phase terms. That is to say, the data of a binary (black and white) image is formed into counterpart first and second values of phase shift.

25 The image production and capture device 8 may alternatively be in line with the fibre 2, e.g. in the location marked 30, and receive the second emergent beam 70 after passing through a half-wave plate. In a further embodiment, there are image production and capture devices  
30 8 in both locations. In such an embodiment, the laser light may have two wavelengths and filters be disposed in front of each image production and capture device 8.



The light 7a from the half-wave plate 9 passes into  
~~the spatial light modulator through the transparent~~  
electrode 204. The phase of the light 7a is changed by the  
5 in-plane tilt of the ferroelectric liquid crystal layer 203  
within the pixel of concern. The light 7a is reflected by  
the aluminium electrodes 202 and passes again through the  
liquid crystal layer 203 and through the transparent  
electrode 204 to emerge as exiting light 17. The exiting  
10 light 17 is shifted in phase with respect to the incident  
light 7a by either a first amount, or a second amount  
depending on the voltage between the front electrode 204  
and the aluminium electrodes 202. The exiting light 17  
passes again through the half-wave plate 9 and is incident  
15 on the polarising beamsplitter 6. A first portion 17a of  
the light 17 passes straight through the polarising  
beamsplitter 6 to emerge in line with the incident beam and  
a second portion 17b is reflected back towards the fibre 2.  
The light 17a is incident on the reflecting face of a  
20 concave curved mirror 10 which has a focal length  $f_2$  and is  
located such that its focal plane is at the plane of the  
image production and capture device 8. Thus, collimated  
light 17a which is incident on the curved mirror 10 is  
reflected back as reflected light 17c to the image  
25 production and capture device 8 as a focussed image. The  
distribution of light 17c across the image production and  
capture device 8 is an interference pattern indicative of  
the Fourier transform of image data provided by the image  
production portion 8a.

30

The correlator 1 further includes a processing unit 20  
which has a first output 21 for loading into the pixellated  
ferroelectric liquid crystal SLM portion 8a, two images

that are disposed side by side across the SLM, one image representative of the reference image and the other representative of the scene image which is to be correlated with the reference image. The processing unit 20 receives  
5 the reference and scene image data  $r, s$  at a first input 22. It also has a second input 23 for receiving data from the pixels of the image capture portion 8b, and a second output 24 at which correlation data are made available.

10 In the present embodiment the device 8 contains circuitry 500 (see Figure 6) for allotting binary values to the light levels received at the pixels of the image capture portion 8b, and for applying those binary values to  
15 circuitry 500 in this embodiment consists of clocked and gated comparison circuitry. The comparison circuitry 500 compares the amount of input light at each pixel with the averaged magnitude of light at the four nearest-neighbour pixels. The output 330 of the comparison circuitry 500  
20 provides a '1' if the light at the pixel is greater, and a '0' if smaller than the averaged light magnitude of the nearest neighbour pixels. The circuitry output per pixel is thus said to be binarised. The binarised data is connected via a gating circuit (not shown) to the  
25 corresponding pixel of the image production portion 8a of the device 8.

By forming the comparison circuitry 200 on-chip, the signal transfer times, and thus time delays, are reduced.  
30 By providing one comparator per pixel, the comparison operations can be carried out substantially simultaneously and in parallel. This is very time-efficient.

The image data from the binarised results is then  
~~passed through the Fourier optics, and the reflected and~~  
collected data at the pixels of the image capture portion  
5 8b is read out. The data this time is not passed to the  
comparator circuitry 200 but instead is passed to the  
second input 23 of the processing unit 20. Read-out is  
typically by a capacitor transfer system similar to a BBD  
so that the input to the processing unit 20 is bit-serial.

10

In this embodiment the ferroelectric liquid crystal  
SLM is a 256 x 256 pixel device, although other sizes and  
geometries are possible.

15 Referring now to Figures 3 and 4a-c, the device 8  
consists of a silicon wafer 250 with a circuitry portion  
200 on its surface. On the circuitry portion 200 is an  
oxide layer 201 on its surface. On the oxide layer is the  
aluminium reflective electrode layer 202. This layer 202  
20 defines the pixels of the image production portion 8a. As  
shown in Figure 4b the aluminium electrodes 202 are  
substantially square but with a square 302 excised from the  
corresponding corner of each pixel. The excised square 302  
forms a window 210 through which access is available to the  
25 underlying substrate on which there is disposed a  
photodiode 220 and pixel drive electronics 221. Over the  
aluminium electrodes 202 there is disposed an alignment  
layer 205 and, over the alignment layer 205, there is  
disposed a liquid crystal 203 which extends substantially  
30 across the entirety of the SLM. Above the liquid crystal  
layer 203 there is a second alignment layer 206 and on top  
of the second alignment layer 206 is a transparent  
electrode 204. The transparent electrode may be ITO or any

other known transparent electrode material. A spin-on glass coating or other encapsulating or covering material (not shown) is disposed over the transparent electrode layer 204.

5

The circuitry portion 200 is n-type and has, in the region of the window 210, (which it will be understood form a regular array across the substrate) a p-dopant heavily implanted into it to form a shallow implanted region 211.

10 A rear n+ region 212 is implanted in the window area 210 to act as the rear electrode of the photodiode. A front diode electrode 213 is implanted in the window adjacent the edge of the oxide 201 to form the anode of the diode. The rear electrode 212 which forms the cathode and the front  
15 electrode 213 are connected to circuitry (not shown) disposed within the circuitry portion 200, for example disposed under the aluminium electrodes 202 via metal or polysilicon conductors.

20 The image capture device 8a, as discussed above, captures the joint power spectrum  $|R+S|^2$  of the two images. The joint power spectrum is defined by equation 3:

$$|R+S|^2 = R^*S + S^*R + R^2 + S^2 \quad \text{----- (3)}$$

25 where R is the Fourier transform of the reference image, S is the Fourier transform of the scene images to be correlated with the reference image.

In this relation, the terms  $R^*S$  and  $S^*R$  form desired  
30 and symmetrical correlation terms that appear in the output. The terms  $R^2$  and  $S^2$  relate to the zero-order output which appears as an undiffracted central bright spot.

The processing unit 20 receives the data from the  
pixels and generates correlation data from that data by  
extracting the zero-order bright spot, and computing values  
5 from the brightness and the separation of the correlation  
peaks in the image data.

Referring to Figure 4, a portion of an image  
production and capture device 8 comprises nine pixels P11-  
10 P33 of image production elements and an array of nine image  
capture sensor devices S11-S33. As shown, and as described  
with respect to Figure 3, the capture devices are within a  
cut-out portion of the production devices P11-P33.

15 Although in this embodiment the sensor devices S11-S33  
are interspersed within the production devices P11-P33, the  
same principles will apply if the image production device  
and the image capture device are separately disposed on the  
same substrate.

20

The present description relates to the image  
production device P22 and the image capture device S22. It  
will be understood that similar circuitry will be provided  
for each and every other one of the pixels of the image  
25 production and capture device 8 which may have, as  
previously described, 64K pixels.

For the pixel P22, S22 there is provided a comparator  
circuit 500 having two inputs 503, 510. The first input  
30 503 is connectable via a switch 502 to the line 501 from  
the image capture sensor S22. The second input 510 of the  
comparator 500 is connected to the sensors S11, S13, S31  
and S33, which are the nearest-neighbouring pixels to the

pixel S22, P22. The connection to the second input 510 is via switches 511, 512, 513, 514. The switch 502 connected to line 501 may be switched over to an alternative connection in which the line 501 is connected to a charge transfer device 505 of which only a portion is shown.

The output 520 of the comparator 500 is connected to the pixel P22 of the image production device.

10       The comparator 500 is arranged to compare the potential at first input 503 with the average of the potentials at the sensors S11, S13, S31 and S33. To do this, the switches 511-514 are closed and the comparator then provides a logical one output at the output 520 if the  
15 first input 503 is above one quarter the potential at the second input 510. Thus, provided the light input at the capture device S22 is greater than the average of the light at the capture devices S11, S13, S31 and S33 then the output 520 will be at logical one. In all other conditions  
20 the output 520 will be at logic zero. Comparators may be provided which operate using current or which operate using voltage, as will be described with respects to Figure 6..

In use therefore when the first Fourier transform has  
25 been formed on the image production and capture device 8, the connection of the switch 502 will be as shown. The result is that the comparator 500 which is on the same substrate as the other components, will provide an output directly to the image production pixel P22 and all of the  
30 comparator circuits for each pixel will perform the same (non-destructive) comparison.

Once the first Fourier transform has been formed and the binarised data provided to the image production pixels,

~~then the image capture pixels will receive the joint power spectrum,~~ which is required to provide the correlation

5 result. The correlation results are processed off chip and to that end the switch 502 is switched to its second position where it connects to the input line 504 to the charge transfer device 505. The charge transfer device has two clock inputs 506, 507 and operates in a form analogous  
10 to a bucket brigade device so that once a capacitor 520, 521 is charged up to the potential provided by an associated capture device 522, suitable clock pulses provided to the clock terminals 506, 507 cause the associated transistors 530, 531 to clock-out a series of  
15 analogue voltages to the output terminal 508. The analogue voltages correspond to the sensors arranged in a row of the image production and capture device 8. After outputting the bit-serial voltages, these are processed as required to provide the relevant information.

20

Referring now to Figure 6, a comparator circuit 500 compares the output voltage from a photodiode 310 of a pixel with the corresponding output voltages of the four nearest pixels, such voltages being supplied to four input  
25 nodes 301-304 of the circuit 500. The comparator 500 is a clocked device and has six clock inputs 320-324. The comparator circuit 500 has an output node 330. The structure of the comparator 500 will now be described.

30 The comparator circuit 500 comprises a source-coupled pair of nFETs 350, 351. The common sources of the nFETs 350, 351 are connected to reference potential 305 via the drain-source path of a current source nFET 352. The drain

of the first nFET 350 is connected to a positive supply 306 via the drain-source path of a first pFET 353 and the drain of the second nFET 351 is connected to the positive supply 306 via the drain-source path of a second pFET 354. The  
5 first nFET is connected to a first line 331 via a transmission gate FET 355 controlled at its gate via the second clock input 321. The first input line 331 is connected to the positive supply 306 via a first p-type pre-charge FET 356 and to the negative supply 306 via four  
10 quarter-size n-type pull-down FETs 357-360. The quarter size n-type pull-down FETs each receives at its gate one of the neighbouring pixel inputs 301-304. The second n-type FET 351 is connected to a second input line 332 via a transmission gate FET 361 whose control electrode is  
15 provided by the third clock input 323. The second input line 332 is connected to the positive supply 306 via a second p-type pull-up FET 362 whose gate is connected to the first clock input 320. The second input line 332 is connected to the reference 305 via a fifth pull-down FET  
20 363 of unit size, the gate of the fifth pull-down FET 363 being connected to the photodiode 310.

The operation of the comparator 500 will now be described.

25

Prior to any sensing operation, the clock inputs 320-323 are taken low so as to turn off the transmission gates 355 and 361 and to turn on the pre-charge transistors 356, 362. The result is that the capacitance of the lines 331  
30 and 332 are pre-charged towards the positive supply potential. As the pull-up FET 356, 362 are of identical size and provided the capacitance of the lines 331, 332 are the same, the same amount of charge will be stored on the



two lines. Measures may be needed to ensure that the capacitances of the two lines 331, 332 are the same.

During this pre-charge interval, the photodiode 310  
5 and the photodiodes of the nearest neighbouring pixels are unilluminated and, as a result, the transistors 357-60 and 363 remain off.

At a given time instant the clock inputs 320 are taken  
10 high, thus turning off the pull-up transistors 356, 362. At this time illumination is applied to the photodiode 310 and the photodiodes of the neighbouring pixels so that the line 331 and the line 332 are pulled down towards the reference potential 305. If all of the photodiodes  
15 receives the same amount of illumination, lines 331 and 332 will drop at the same rate. This is because the transistors 357-360 are one quarter the size of transistor 363. However, if the light applied to photodiode 310 is greater than the average of the light applied to the  
20 photodiodes connected to terminals 301-304, then the line 332 will be pulled down more rapidly than the line 331. After a given time has elapsed, the clock voltages applied to nodes 321 and 323 are taken high at the same time as the clock voltage applied to nodes 324 and 322. This has the  
25 effect of connecting the lines 331 and 332 to the gates of transistors 350 and 351. As the common source electrodes of the transistors 350 and 351 are taken towards the negative supply by the action of transistor 352, one of the two transistors 350 and 351 turns on and the other turns  
30 off, according to the respective gate voltages applied. As a result, if the second line 332 is at a lower potential than the first line 331, then the transistor 350 will turn on and provide a low potential at output node 330. If

instead the first output line 331 is at a lower potential than the second line 332, then the transistor 350 remains off and the transistor 351 turns on. The result is that the output node 330 remains at the logic high state.

5

An alternative correlator 500 is shown in Figure 2. Here, the image production and capture device 8 of Figure 1 is replaced by an integrated circuit 108 which has an FLC SLM portion 107 and a spatially separate image capture portion 106. The image capture portion 106 and the image production portion 107 are disposed on the same face of the device 108. The image capture portion 106 is disposed beyond the image production portion 107 and to the side of it. The curved mirror 10 is tilted off the axis of the beamsplitter 6 so that the resulting Fourier Transform is produced at the image capture portion 106. This allows the FLCSLM and CMOS sensor to be separate but integrated on the same substrate. It is alternatively possible for the FLC SLM 107 and the sensor 106 to be discrete units.

20

Separating the FLC SLM 107 and the sensor 106 decreases the complexity. The CMOS sensor 106 contains smart pixel technology to perform the binarisation process of the captured joint power spectrum.

25

In the foregoing example, the nearest-neighbour thresholding has been described as comparison with the four nearest-neighbour pixels. It is also possible to use other thresholding, such as comparison with the eight surrounding pixels.

30

Embodiments of the present invention have been described with particular reference to the examples  
~~illustrated. However, it will be appreciated that~~  
variations and modifications may be made to the examples  
5 described within the scope of the present invention

Claims

1. An optical correlator having an image production device, an image capture device and an optical device  
5 constructed and arranged to provide a Fourier transform of image information on the image production device at the image capture device, wherein the image production device and image capture device are disposed in a common plane.
- 10 2. An optical correlator according to claim 1, wherein the image production device and the image capture device are integrated on a common substrate.
3. An optical correlator according to claim 1 or 2,  
15 wherein the image production device has plural image production elements, the image capture device has plural image capture elements and the image capture elements are interspersed with the image production elements.
- 20 4. An optical correlator according to claim 1 or 2, wherein the image production device has plural image production elements, the image capture device has plural image capture elements and each image production element includes an image capture element.  
25
5. An optical correlator according to claim 1 or 2, wherein the image production device and the image capture device are spatially separate.
- 30 6. An optical correlator according to any preceding claim, wherein the optical device comprises at least one positive power optical device arranged to receive light

from the image production device and to pass light back to the image capture device.

7. An optical correlator according to claim 6, wherein  
5 the positive power optical device comprises a curved mirror.

8. An optical correlator according to claim 6, wherein  
the positive power optical device comprises a planar mirror  
10 and a positive power lens.

9. An optical correlator according to any preceding  
claim, having circuitry for applying reference image data  
to one part of the image production device, and circuitry  
15 for providing scene data to another distinct part of the  
image production device.

10. An optical correlator according to any preceding  
claim, wherein the image production device is operable to  
20 provide phase modulation of incident light according to  
applied image data.

11. An optical correlator according to claim 10, wherein  
the image production device has two output levels only.  
25

12. An optical correlator according to any preceding  
claim, wherein the image production device comprises a  
ferroelectric liquid crystal on silicon spatial light  
modulator.

30

13. An optical correlator according to any one of claims 1  
to 12, wherein the image production device comprises one  
from the group comprising a nematic liquid crystal on

silicon spatial light modulator, a pi-cell spatial light modulator and a microelectromechanical systems (MEMS) spatial light modulator.

5 14. A pixellated image capture device for a joint  
transform correlator, the capture device being constructed  
and arranged to provide an electrical signal per pixel  
representative of the quantity of light received at the  
pixel wherein the image capture device is integrated on a  
10 silicon substrate, and the integrated device further  
comprises processing circuitry constructed and arranged to  
compare the electrical signal of each pixel of the image  
capture device against a threshold, and to provide an  
output signal per pixel in accordance with the comparison  
15 result.

15. A pixellated image capture device according to claim  
14, wherein the threshold is formed from the electrical  
signals of at least one pixel adjoining the said pixel.  
20

16. A pixellated image capture device according to claim  
14 or 15, comprising a pixellated image production device,  
wherein the processing circuitry is constructed and  
arranged to provide each output signal per pixel to a  
25 respective pixel of the image production device.

17. A pixellated image capture device according to claim  
16, having output circuitry for reading out unprocessed  
information from each pixel of the image capture device.  
30

18. A pixellated image capture device according to claim  
16 or 17, wherein the pixellated image production device is

integrated on the same substrate as the image capture device.

19. A method of correlating at least one input image with  
5 at least one reference image, the method comprising:-

illuminating a representation of the or each input image and the or each reference image with coherent light to provide a first light beam; and,

passing the first light beam to an optical device  
10 disposed to provide a second image at a plane, the second image being a Fourier transform of the or each input image and reference images;  
wherein the second image is formed co-planar with the representation of the or each input image and reference  
15 image.

20. An integrated circuit comprising a liquid crystal on silicon spatial light modulator and an image capture device, the spatial light modulator having an array of  
20 light modulating elements and the image capture device having an array of light capture elements, wherein each light capture element is arranged to provide an output representative of the light picked up by the respective capture element, the integrated circuit further having  
25 processing circuitry for each capture element constructed and arranged to process the output of the said capture element together with the output of at least a respective one other capture element and to provide a first output from each capture element in response to such processing,  
30 the capture array further having output circuitry for outputting the unprocessed output of each capture element.

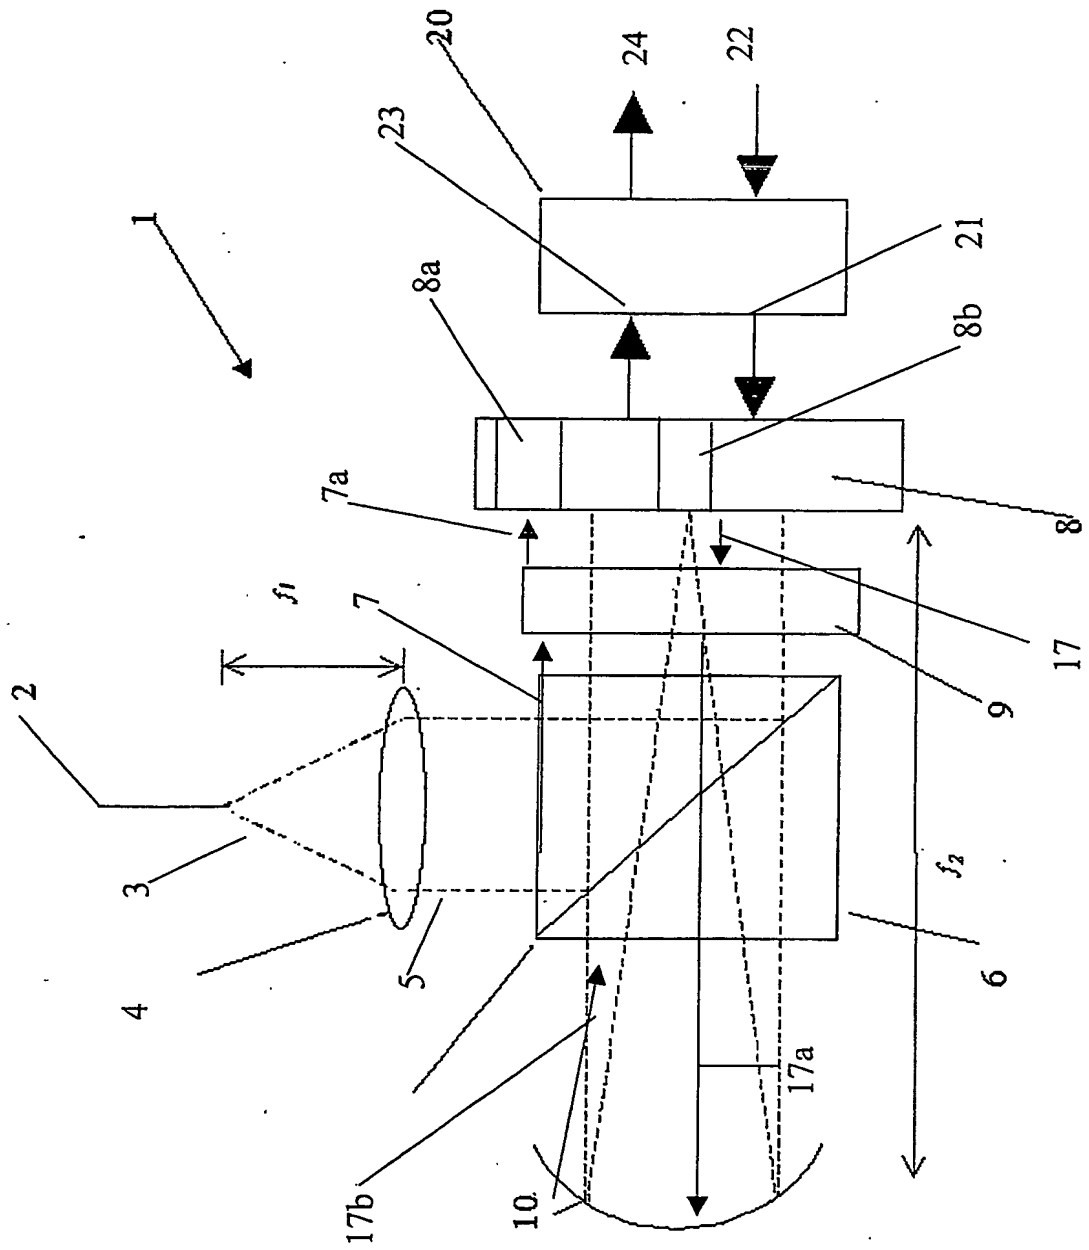


Figure 1



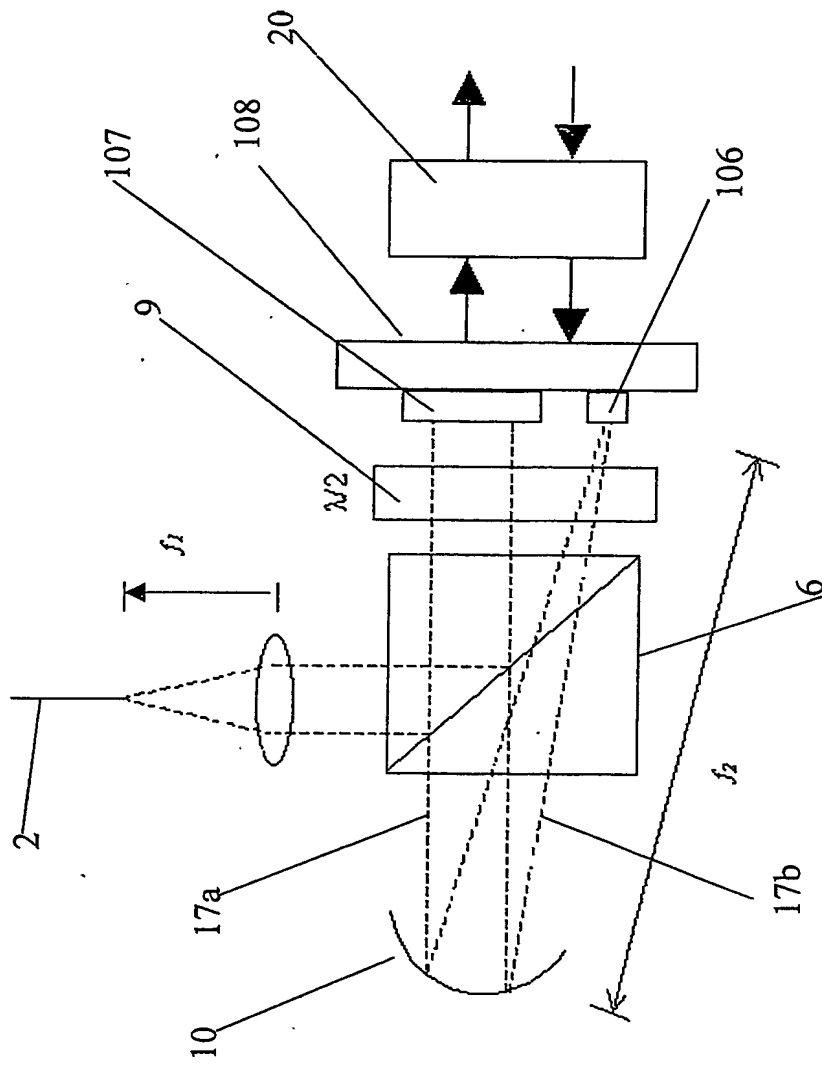


Figure 2

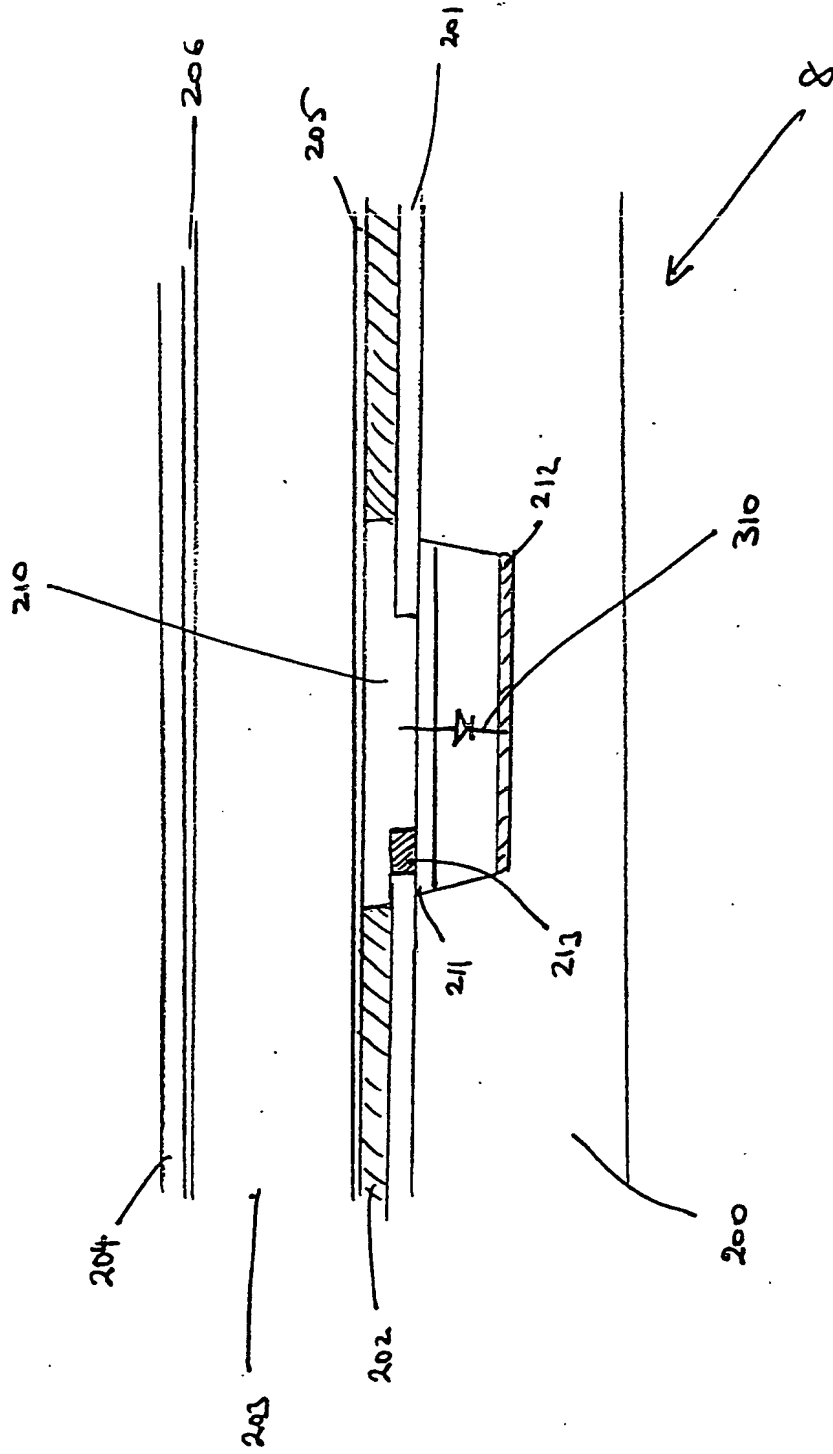


FIG. 3

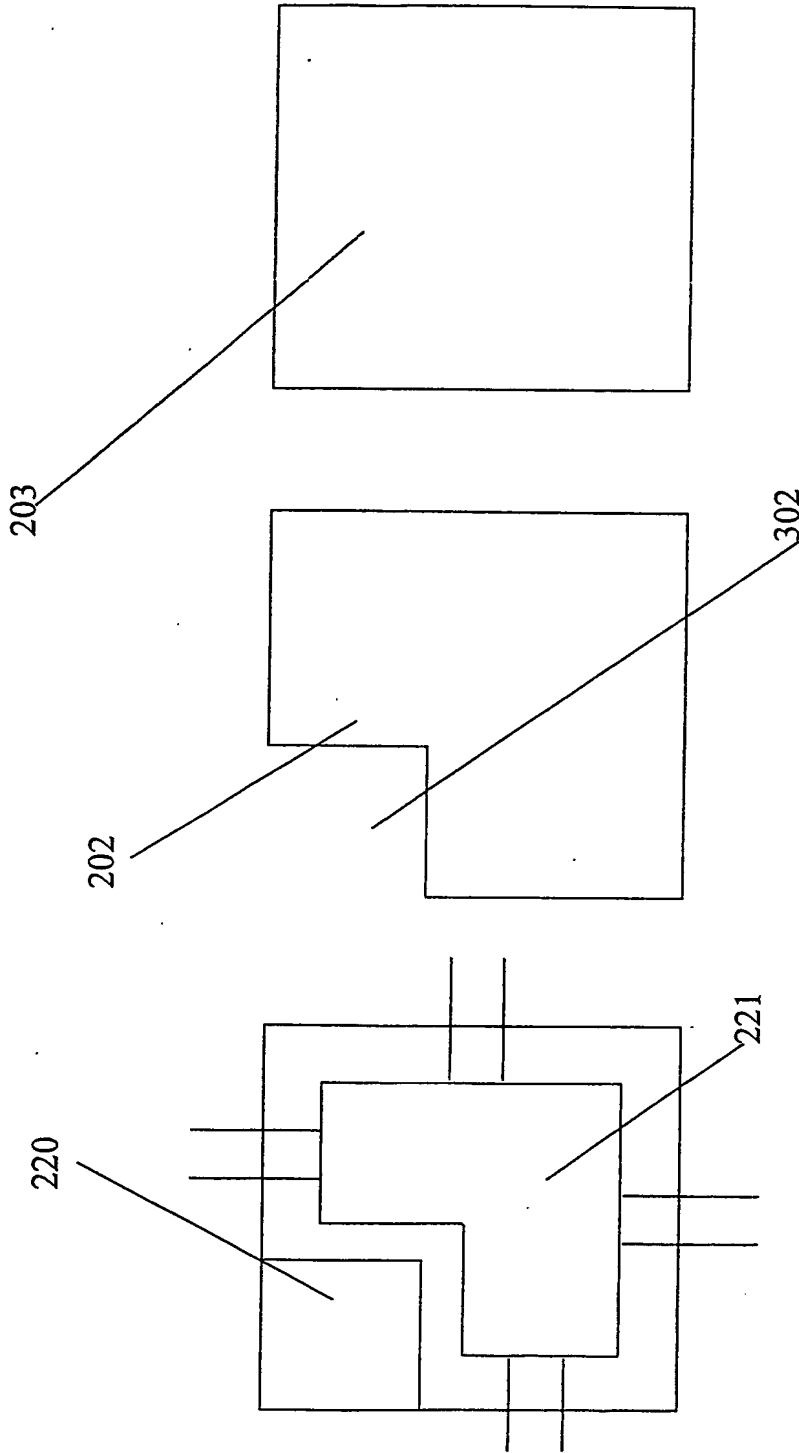


Figure 4a

Figure 4b

Figure 4c

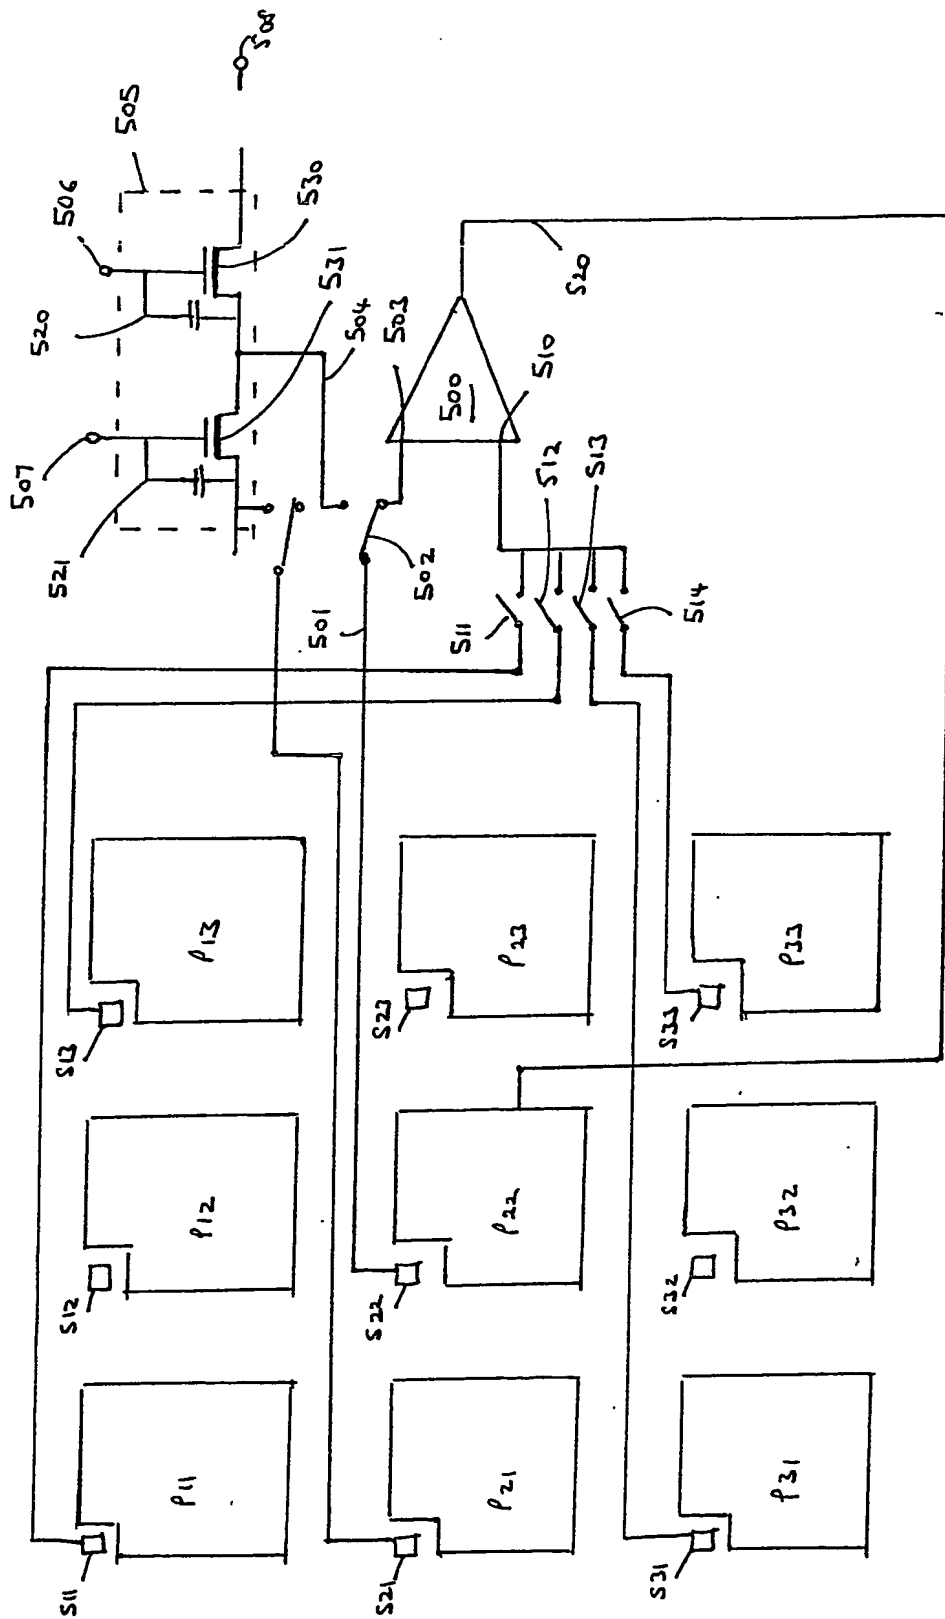


FIG 5

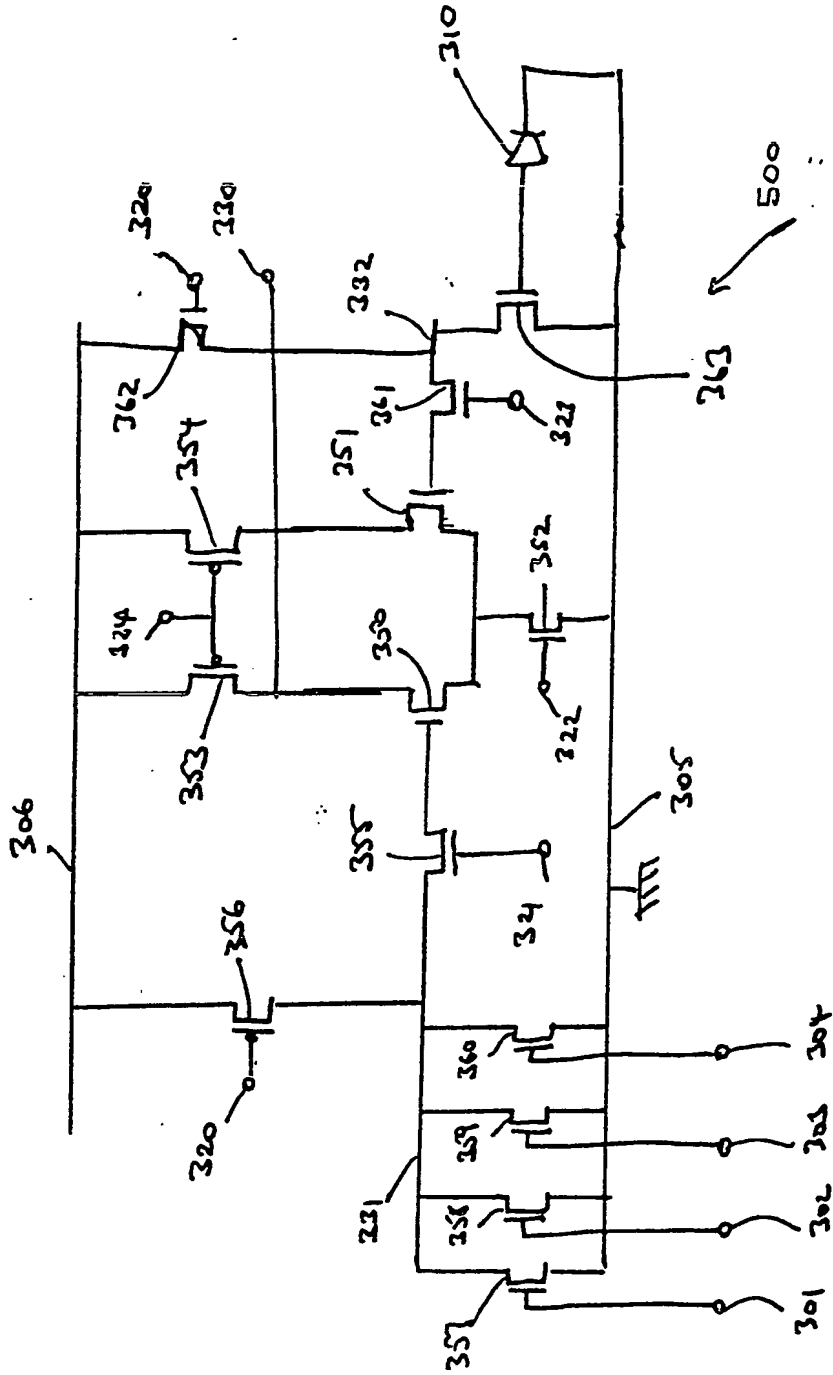


FIG. 6

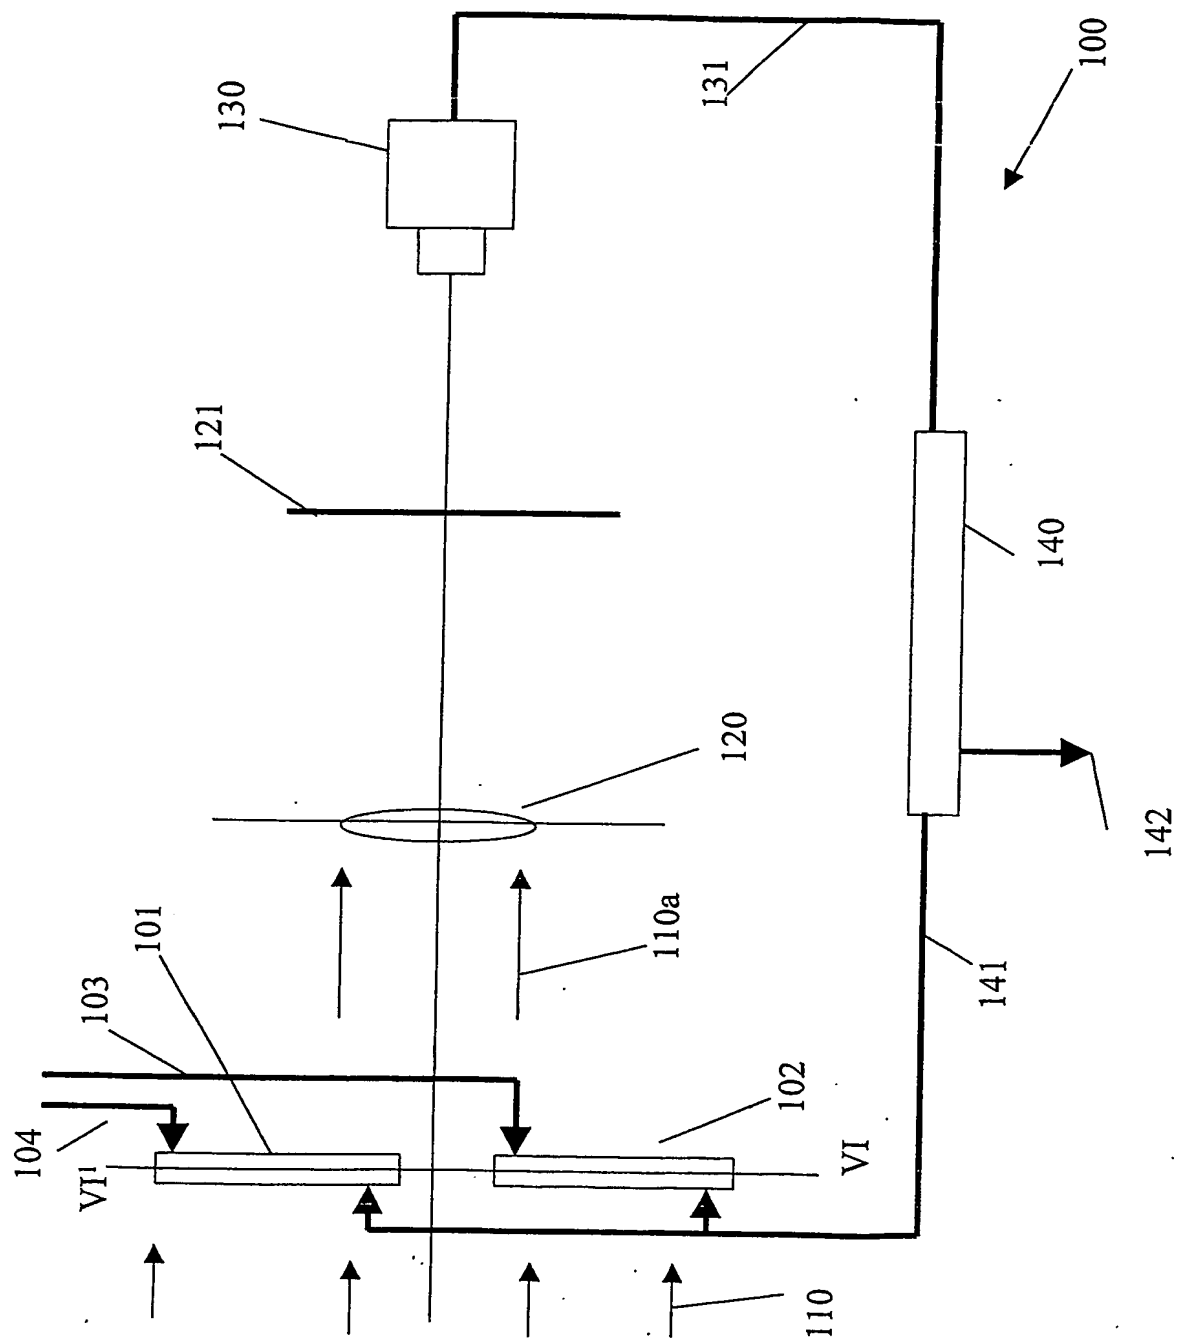


Figure 7

PCT Application  
**GB0303920**

